

# TX-5260RGBW150C33M10-A01

## PRODUCT SPECIFICATION

### Features:

- ◆ Excellent transiting heat from LED chip operating under 1.2 A.
- ◆ Mixing any two colors of light, there will be no partial color and color spots uneven phenomenon.
- ◆ High luminous output.
- ◆ No UV.
- ◆ Encapsulated materials are environmentally certified and meet environmental requirements.

### Chip Material:

- ◆ Red: AlGaInP
- ◆ Green: GaInN
- ◆ Blue: GaN
- ◆ White: GaN

### Emitting Color:


- ◆ Red
- ◆ Green
- ◆ Blue
- ◆ white

### Applications:

- ◆ Entertainment lighting
- ◆ Landscape lighting
- ◆ Commercial lighting
- ◆ Decorative lighting

Part No.	TX-5260RGBW150C33M10-A01	Spec No.	WKF-BF0402	Page	1 of 8
----------	--------------------------	----------	------------	------	--------

**Package Dimensions:**

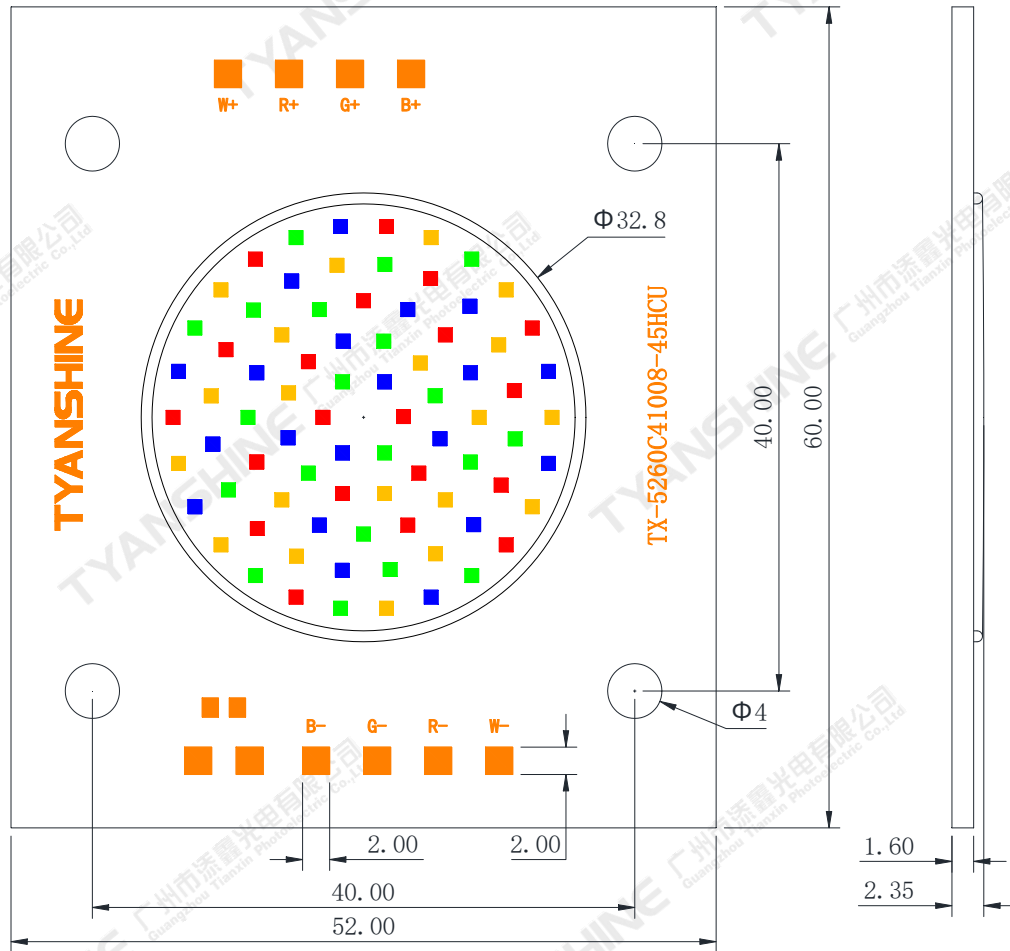

**Notes:**

- 1.All dimensions are in millimeters .
- 2.Tolerances unless otherwise mentioned are  $\pm 0.1$ mm .

Part No.	TX-5260RGBW150C33M10-A01	Spec No.	WKF-BF0402	Page	2 of 8
----------	--------------------------	----------	------------	------	--------

**Absolute Maximum Ratings (Tc=25°C)**

Parameter	Symbol	Ratings	Unit	
Forward Current	IF	1.2	A	
Reverse Voltage	VR	Not designed for reverse operation	V	
Power Dissipation	PD	R	28800	mW
		G	40800	
		B	40800	
		W	40800	
Junction Temperature	Tj	R	115	°C
		G	135	
		B	135	
		W	135	
Electrostatic Discharge Threshold (ESD)	ESD	2000	V	
Storage Temperature	Tstg	-30~+70	°C	
Operation Temperature	Topr	-30~+80		

**Notes:**

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:  
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

**Electrical Optical Characteristics (Tc=25°C)**



Parameter	Symbol	Condition	Emitting Color	Min.	Typ.	Max.	Units
Luminous Flux	$\phi_v$	If=1.2A	R	1700	2100	—	lm
			G	2700	3200	—	
			B	550	700	—	
			W	3000	3500	—	
Dominant Wavelength	$\lambda_d$		R	620	625	630	nm
			G	524	527	532	
			B	460	463	466	
Correlated Colour Temperature	CCT		W	6000	7000	8000	K
Peak-emission Wavelength	$\lambda_p$		R	625	630	635	nm
			G	510	515	520	
			B	458	460	462	
Spectral Line Half-Width	$\Delta\lambda$		R	15	20	25	nm
		G	25	30	35		
		B	15	20	25		
		W	15	20	25		
Forward Voltage	$V_f$	R	20	22	24	V	
		G	30	32	34		
		B	30	32	35		
		W	30	32	34		
Viewing Angle at 50% IV	$2\theta_{1/2}$	—	—	—	120	—	Deg
Thermal Resistance Junction to Case	$R\theta_{J-C}$	If=1.2A	—	—	0.2	—	K/W
Temperature Coefficient of Voltage	$V\Delta F/T$	If=1.2A	—	—	-2	—	mV/°C



**Notes:**



- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.Luminous flux measurement tolerance:±15%.
- 4.Forward voltage measurement tolerance:±0.15V.

## Typical Electrical/Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

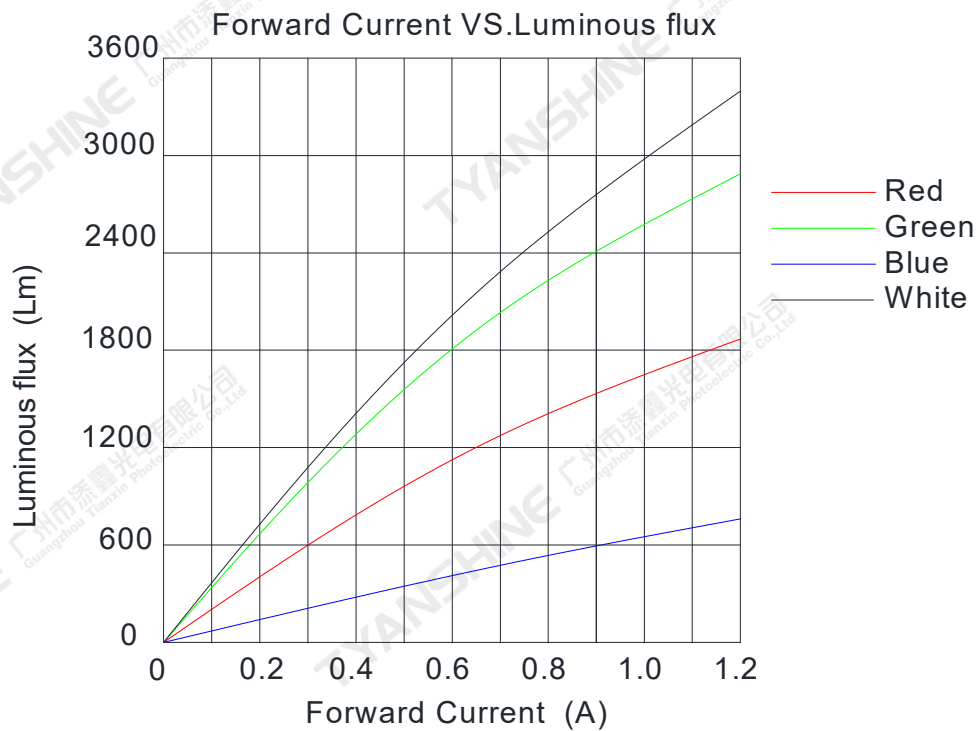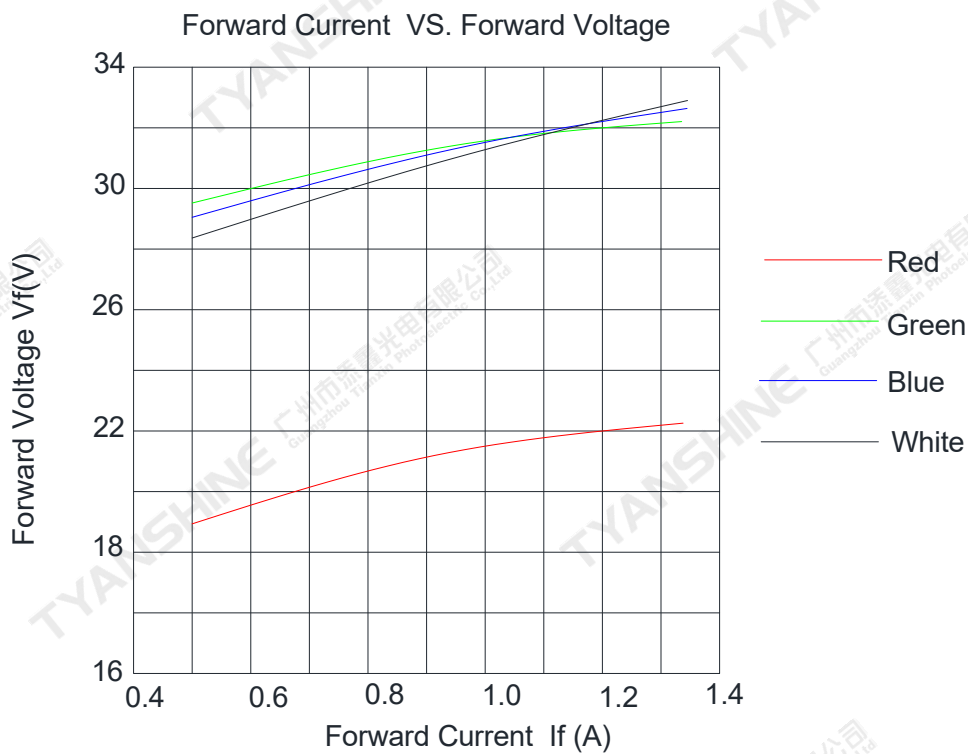

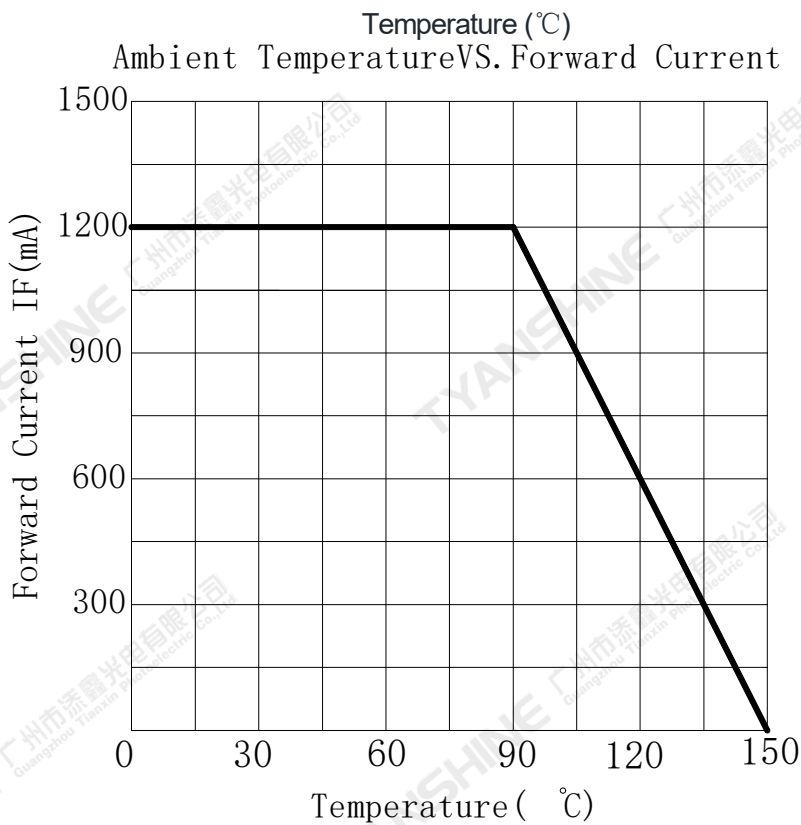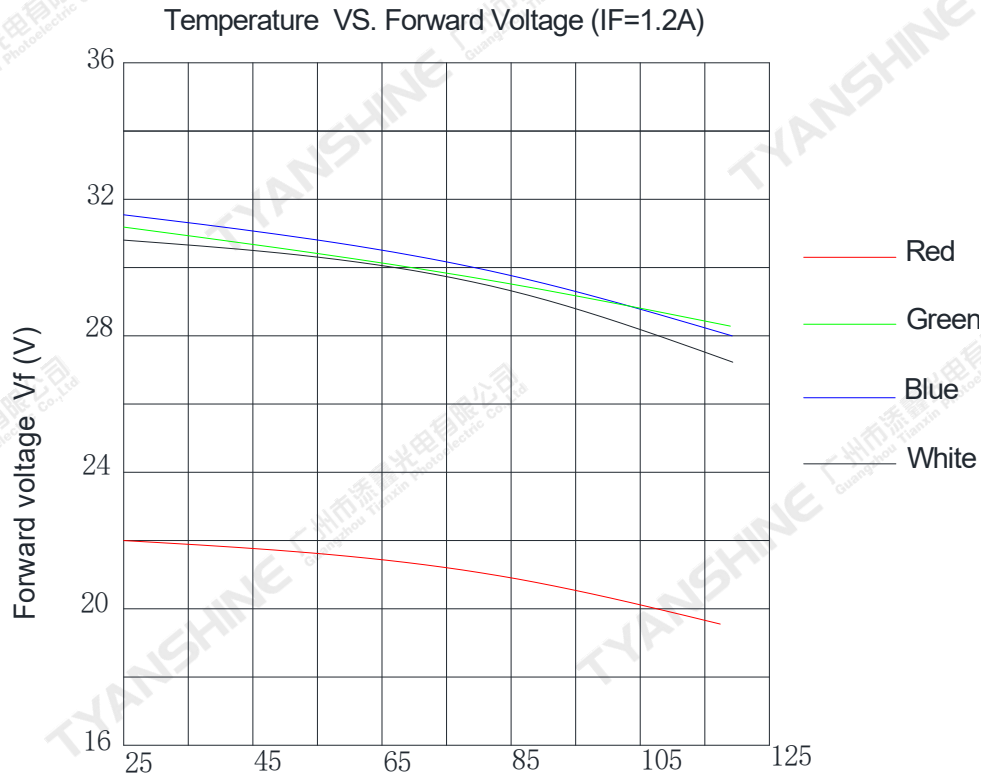

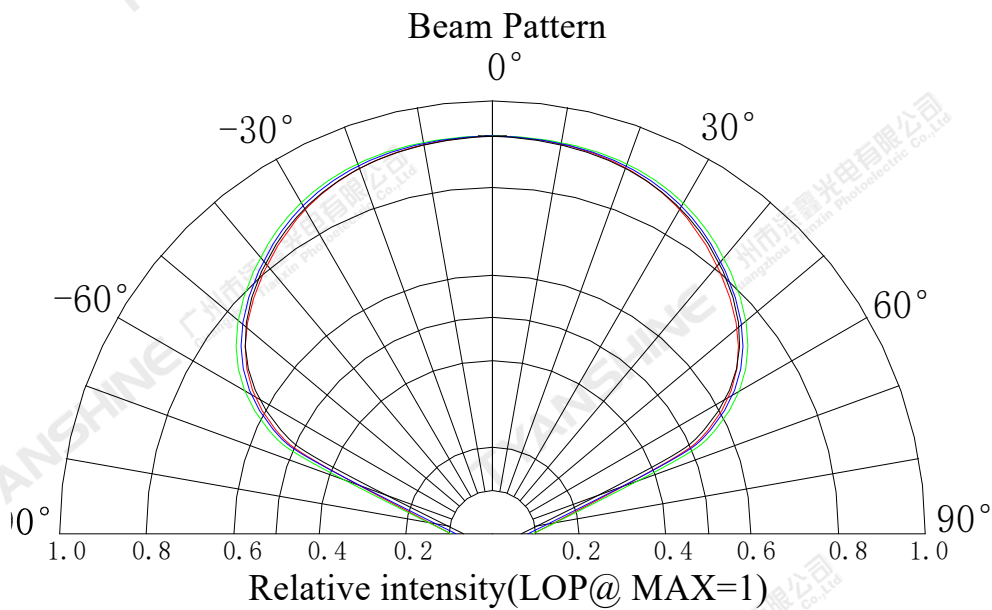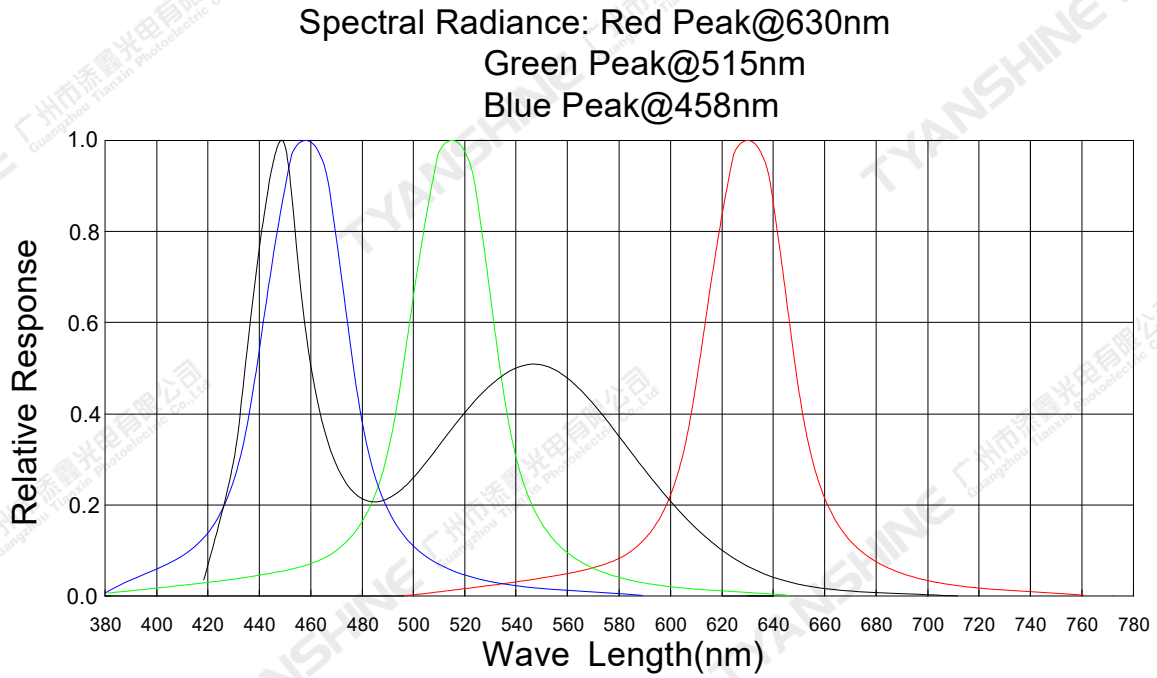


**Notes:**

1. 2θ 1/2 is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is ± 5°.

Part No.	TX-5260RGBW150C33M10-A01	Spec No.	WKF-BF0402	Page	7 of 8
----------	--------------------------	----------	------------	------	--------

**Dimensions For Cannulation And Packaging**

**Quantity: 6PCS**

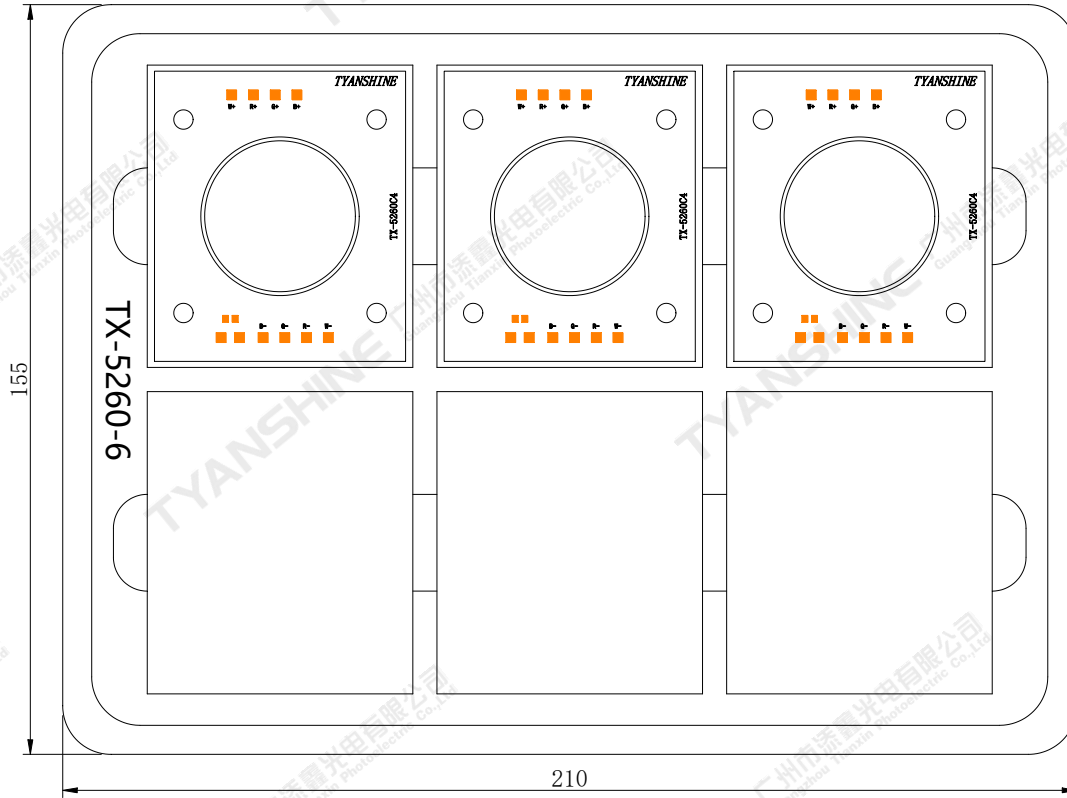

**Notes:**

1. All dimensions are in millimeters.
2. Tolerances are  $\pm 2.0$  mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irreponsible of the Company.

Part No.	TX-5260RGBW150C33M10-A01	Spec No.	WKF-BF0402	Page	8 of 8
----------	--------------------------	----------	------------	------	--------